

# Freestanding Concourse Mobile Drawer Pedestal 553100 and 553200



Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and personal injury.

## Mobil Pedestal Casters Installation

**Note:** Five casters are provided for installation to the base of the mobile pedestal. Four larger casters will thread into the four corners. One smaller anti-tip caster will fasten to the front of the drawer body for all except file/file units.

1. Thread the four larger casters into the inner-most weld-nuts at each corner of the pedestal base (Detail B). Position two casters with locking brakes at the front of the unit. Be sure to twist the caster shank in tight such that the shoulder of the shank is flush and tight to the weld-nut. (Fig. 1)
2. If applicable, extend the bottom drawer of the pedestal out to expose the center caster mount. Fasten the anti-tip caster to the drawer bracket and secure firmly in place with the  $\frac{5}{16}$ -18 lock washer nut. (Fig. 1)

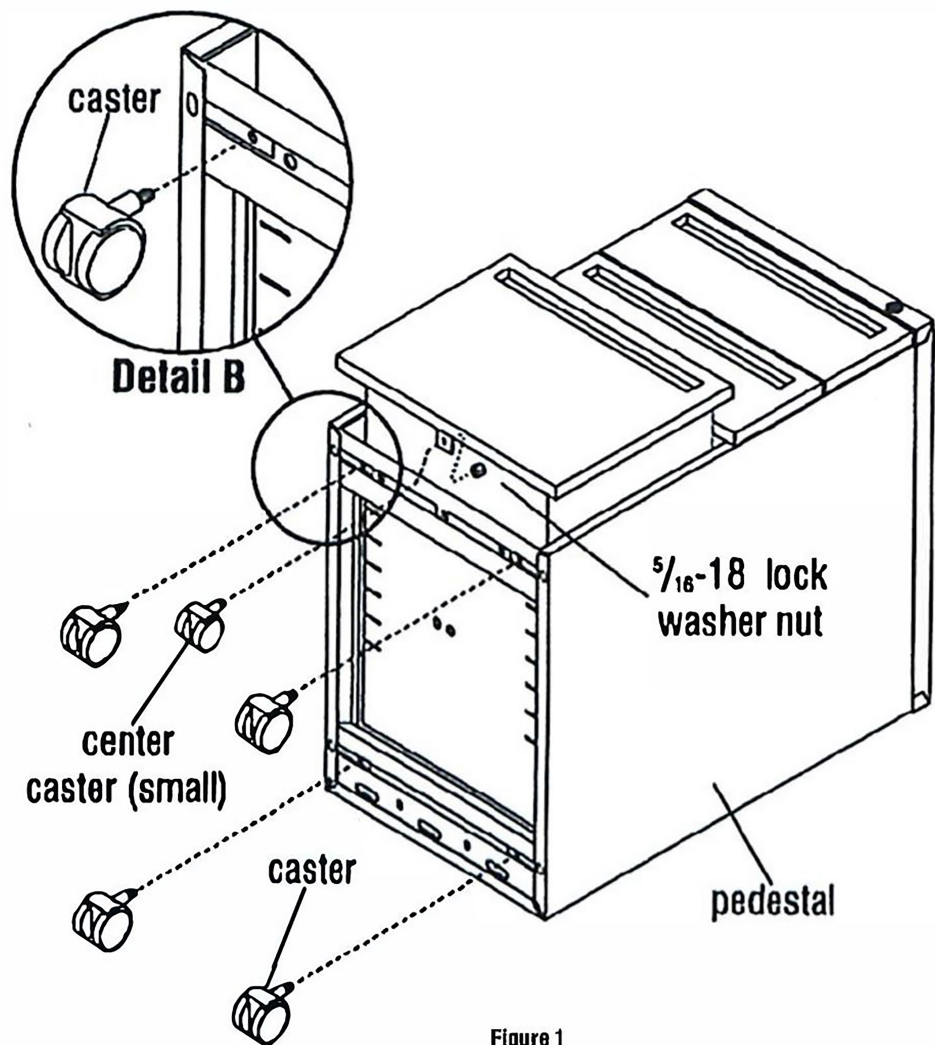


Figure 1